

## New Parking Stick Install “How To” Guide



Here at The Figaro Shop, we pride ourselves at being at the forefront of parts development for the Nissan Figaro and supporting the products we develop. As part of this support (as we understand that we have customers that like to fit their own parts and for our international customers) we have put together several guides illustrating how our parts are fitted.



#### **Parts Included:**

- 1x Parking Stick With Finial (pre-fitted)
- 1x Genuine Nissan Bumper Bolt with nut
- 1x Rubber Insulator Gasket
- 1x Under Bumper Bracket (not chrome)
- 2x Under Bumper Bracket Retainer Bolts
- 1x Chrome Washer (thick)
- 1x Chrome Parking Stick Retainer Nut
- 1x Rubber Isolator (for side of parking stick)
- 1x Chrome Upper Bumper Bracket


#### **Tools Needed:**

- Philips Screw-Driver
- 12mm Spanner / Socket (or 13mm if non standard retainers have been used)
- Cloth and Cleaning solution (window cleaner / brake cleaner)
- 8mm Spanner / Socket
- 10mm Spanner / Socket

**PLEASE READ** — this guide is intended to aid in the installation of our products. It is recommended that factory manuals or instructions are followed to remove the original struts from the vehicle. Some instructions in this guide are generic. The factory manual should supersede any contradiction.

#### **Installation Process:**

1. Lifting the car safely using a jack or vehicle ramp, Remove the front inner wheel arch liner clips/fasteners as shown below to gain access to the front left corner of the underside of the bumper.

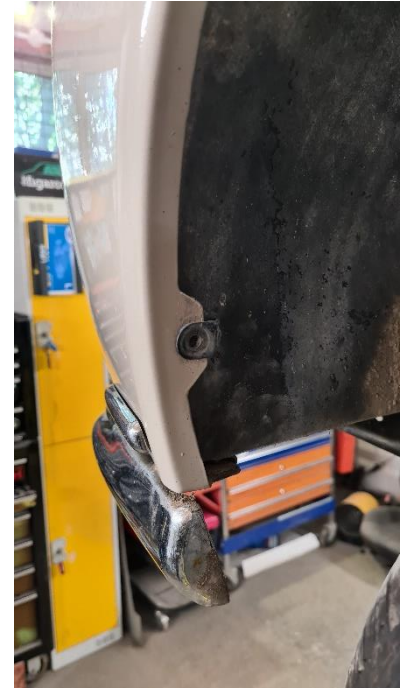


2. Bend the wheel arch liner away from the underside as shown so full access is available to your working area.



3. Un bolt the bumper corner bolt that attached the corner bumper to the front wing/fender to gain access for the parking stick bracket.
4. Using the 2 small bolts, fasten the parking stick under bumper bracket to the main chrome parking stick bracket as show below.



5. Fit the parking stick rubber isolator to the main parking stick bracket and slide it between the front wing/fender and the bumper as shown below

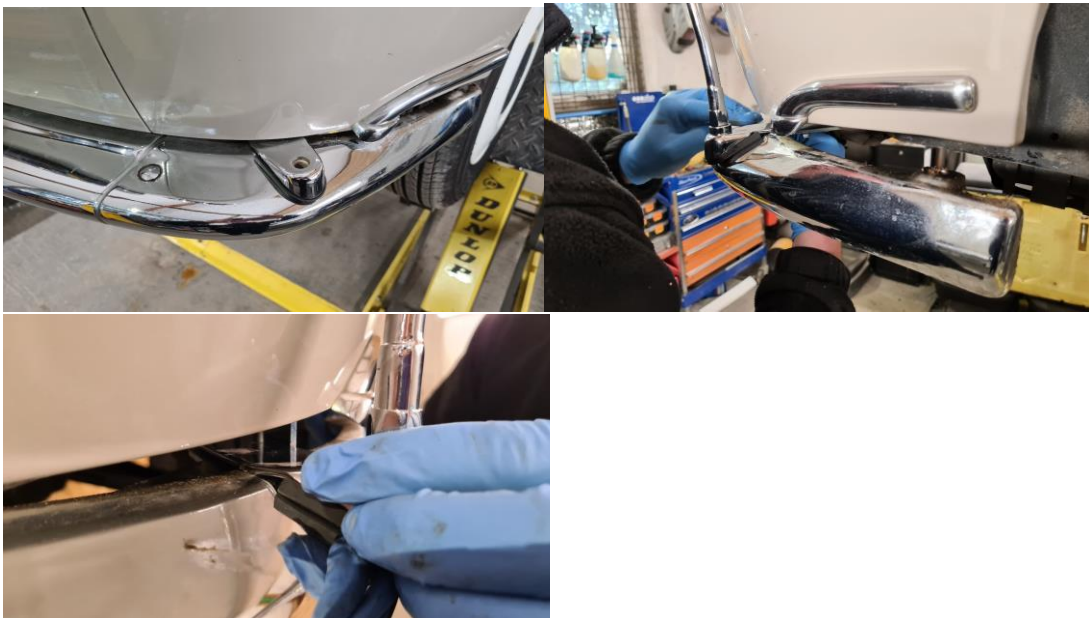

6. Un bolt the bumper bolt attaching the corner bumper to the centre bumper section and replace the bolt with the new genuine bolt included. Using the new nut, attach the under

bumper parking stick bracket to the new bumper bolt and secure with the nut.



7. Re attach the bumper to the wing/fender re-using your old hardware. The main bracket should feel secure and fit snug between the wing/fender and the bumper.

- Using the chrome nut and thick chrome washer, screw the nut (in the orientation shown below) onto the parking stick all the way up and slide the thick washer over the remaining thread.



9. If not already pre-fitted, fit the small rubber isolator into the side of the parking stick. This is designed to protect the wing/fender from the parking stick in case of any movement/deflection.



10. Screw the parking stick into the main chrome parking stick bracket all the way down. Once seated, rotate backwards to align the parking stick correctly. Once in the correct orientation, screw the chrome nut back down to tighten against the washer and main bracket to secure the parking stick.

