

## Rear View Mirror Glass Install “How To” Guide

Here at The Figaro Shop, we pride ourselves at being at the forefront of parts development for the Nissan Figaro and supporting the products we develop. As part of this support (as we understand that we have customers that like to fit their own parts and for our international customers) we have put together several guides illustrating how our parts are fitted.

### Parts Included:

1x Figaro Shop Rear View Mirror Glass

### Tools Needed:

Trim Tool (plastic)

Container with boiling hot water

Soft Cloth

Gloves



**PLEASE READ** — this guide is intended to aid in the installation of our products. It is recommended that factory manuals or instructions are followed to remove the original parts from the vehicle. Some instructions in this guide are generic. The factory manual should supersede any contradiction.

**PLEASE READ** — this guide is intended to aid in the installation of our products. It is recommended that factory manuals or instructions are followed to remove the original parts from the vehicle. Some instructions in this guide are generic. The factory manual should supersede any contradiction.

**The instructions below outline the process of changing the mirror glass in the mirror head. Removal of the mirror assembly is required and not included in this guide**

**Installation Process:**

1. Place the mirror assembly on a soft cloth to avoid scratching the outside of the unit.
2. Pour boiling water into a container (we recommend a plastic Tupperware style with lid).
3. Carefully place the mirror assembly into the boiling water and cover with lid (just loose enough to allow pressure to escape) and leave completely submerged for 6-7 minutes. You will begin to see a gap opening around the edge of the mirror glass.



4. Using gloves, remove the mirror from the hot water and place back on the cloth.

**PLEASE READ** — this guide is intended to aid in the installation of our products. It is recommended that factory manuals or instructions are followed to remove the original parts from the vehicle. Some instructions in this guide are generic. The factory manual should supersede any contradiction.



5. Using a plastic trim tool, carefully wedge into the gap and begin working the old glass out, this shouldn't require too much pressure and should come out easily.



**PLEASE READ** — this guide is intended to aid in the installation of our products. It is recommended that factory manuals or instructions are followed to remove the original parts from the vehicle. Some instructions in this guide are generic. The factory manual should supersede any contradiction.

6. Slowly work the trim tool around the rim of the glass/plastic to remove the mirror from the original plastic housing.




7. Once the original glass is removed, quickly get the new mirror glass and place into the plastic head along one side. If this is very tight, re-boil the water and place the head in the container for a few minutes to expand the plastic again.



**PLEASE READ** — this guide is intended to aid in the installation of our products. It is recommended that factory manuals or instructions are followed to remove the original parts from the vehicle. Some instructions in this guide are generic. The factory manual should supersede any contradiction.

8. Apply gentle pressure around the glass and it will pop into place. Once secure, dry the mirror and head, clean the plastic and re-fit to the vehicle.

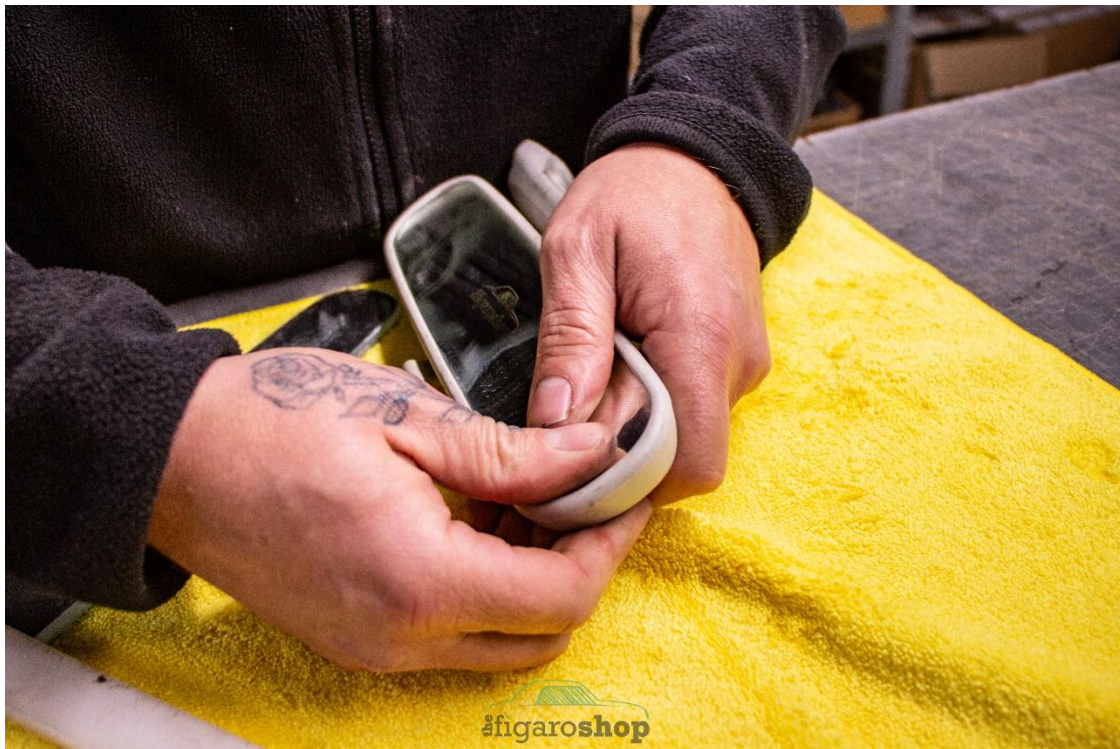

**PLEASE READ** — this guide is intended to aid in the installation of our products. It is recommended that factory manuals or instructions are followed to remove the original parts from the vehicle. Some instructions in this guide are generic. The factory manual should supersede any contradiction.